



深圳市浩凯实业科技有限公司
SHENZHEN CITYHOKAIINDUSTRIALTECHNOLOGYLIMITED

USB 12M auto-focus camera



Product Description:

USB 2.0 interface;


12 megapixel resolution HD camera Fast Focus (PDAF);

With double omnidirectional digital MIC, support recording, video recording;


With power indicator;

Applicable to network broadcast, video conference, video call and other scenarios;


Address: 3rd Floor, Building A, Hangcheng Smart Security Science Park,
Sanwei Community, Xixiang Street, Baoan District, Shenzhen, Guangdong
Tel :0755-27201817

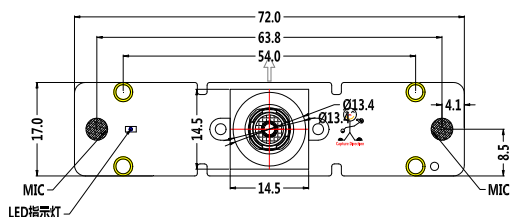

top view




side view

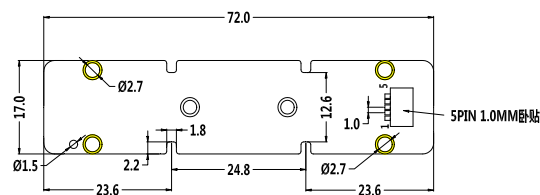

bot view

CONNECTOR USB 5PIN DESCRIPTION

NO.	SYMBOL
1	5V
2	D-
3	D+
4	GND
5	GND

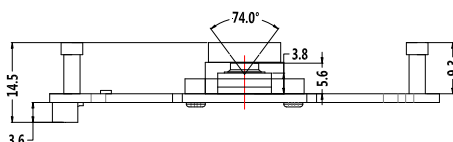

Shenzhen Haokai Industrial Technology Co., LTD

未注公差说明	产品型号: HK12M-H297	3rd ANGLE
尺寸单位 : MM	产品料号:	尺寸比例: 1:1
线性尺寸公差: ± 0.2	产品类型:	设计:
高度尺寸公差: ± 0.2	设计日期:	制图:
钻孔尺寸公差: ± 0.1	版本号:	审核:

photosensitive chip	CMOS 1/2.5"
Pixel Size	1.4 μ m x 1.4 μ m
SNR max	TBD dB
Max Dynamic range	TBD dB
Minimum illumination	0.1Lux at F12
F/No	F1.8 $\pm$ 5%
EFL	4.266mm
FOV	74°
IR	650IR
Lens Construction	5P+IR
Maximum resolution and frame rate	4000*3000 (15ps)、
Other optional resolution ratio	640*480(30fps)、800*600(15fps)、 1280*720(30fps)、1920*1080(30fps)、 1600*1200(15ps)、2048*1536(15fps)、 2592*1944(15ps)、3840*2160(30fps)、
Support format	YUV / MJPG
USB power supply voltage	5V $\pm$ 5%
Connect the interface	1*USB (公) - 1.6 m
Interface speed	480mb/s
Operating system request	Windows XP/ VISTA/ Win7/Win8/ Win10/Linux 2.6.24 and Ubuntu, Mac OS 10.6 and , Android5.1 and
Power Consumption	Regular work : 0.9W
storage temperature	-20° C to + 65° C
working temperature	-10° C to + 60° C
Product structure size	(L) 109.3mm x (W) 56.8mm x (H) 46mm



Reliability test

Serial number	Test item	Conditions and requirements	Test equipment
1	Low temperature storage	-20℃, 72hours Rising and cooling time 30min respectively	cryostat
2	Low temperature operation	-10℃, 16hours Rising and cooling time 30min respectively	cryostat
3	High temperature storage	65℃, 72hours Rising and cooling time 30min respectively	High-temperature cabinet
4	High-temperature operation	60℃, 16hours Rising and cooling time 30min respectively	High-temperature cabinet
5	High temperature and high humidity storage	65℃, 85%RH, 72hours Rising and cooling time 30min respectively	High temperature and constant humidity box
6	High temperature and high humidity operation	60℃, 85%RH, 16hours Rising and cooling time 30min respectively	High temperature and constant humidity box
7	Thermal shock test	-10℃→50℃(30min each) The conversion time between high and low temperature is less than 5 minutes Total:10cycles	Low temperature box/high temperature box
8	Free drop test (after packing)	Height 100cm, 10 times	Oak floor
9	Vibration test (after packing)	30Hz, amplitude 2mm,XYZ in three directions, vibration 30min	Vibration test stand
10	Electrostatic test	150Pf, 330 OHs 8KV, air discharge measurement 10 times	Electrostatic tester
11	Repeated start switch test10,000 times	The Android APP automatically switches the camera on and off 10,000 times	Android device



产品外形尺寸





Packaging method

Packaging Information

Color box size: 104*57*140mm

Product size: 109.3*56.8* 47.8mm

Carton size: 43X30X44cm

Packing number: 60PCS

Net weight: 121g

Package weight: 210g

